

MillLine




TUNG^{ORCE}**F****FEED**


www.tungaloy.com

Tungaloy Report No. 521-G

Small-diameter high feed milling cutter with robust design for stability and efficiency

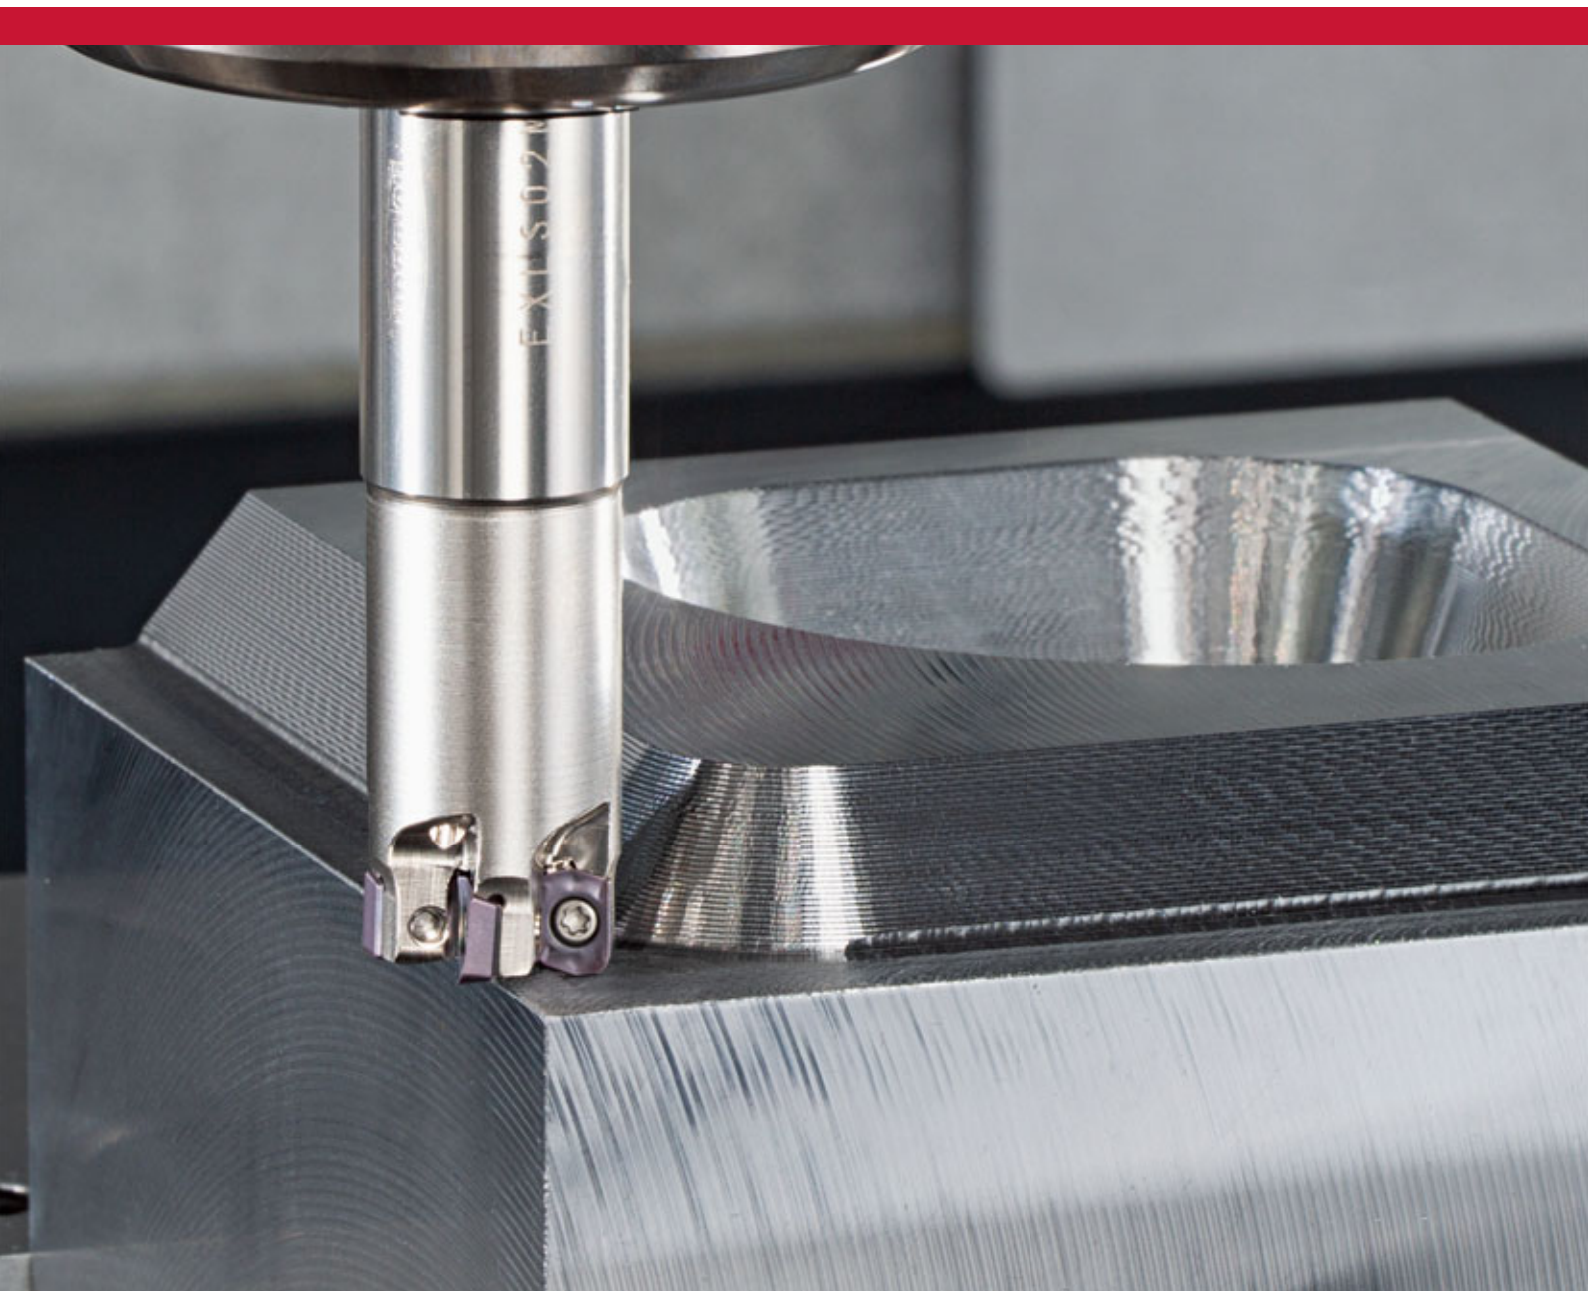

INDUSTRY 4.0
FEED the SPEED!

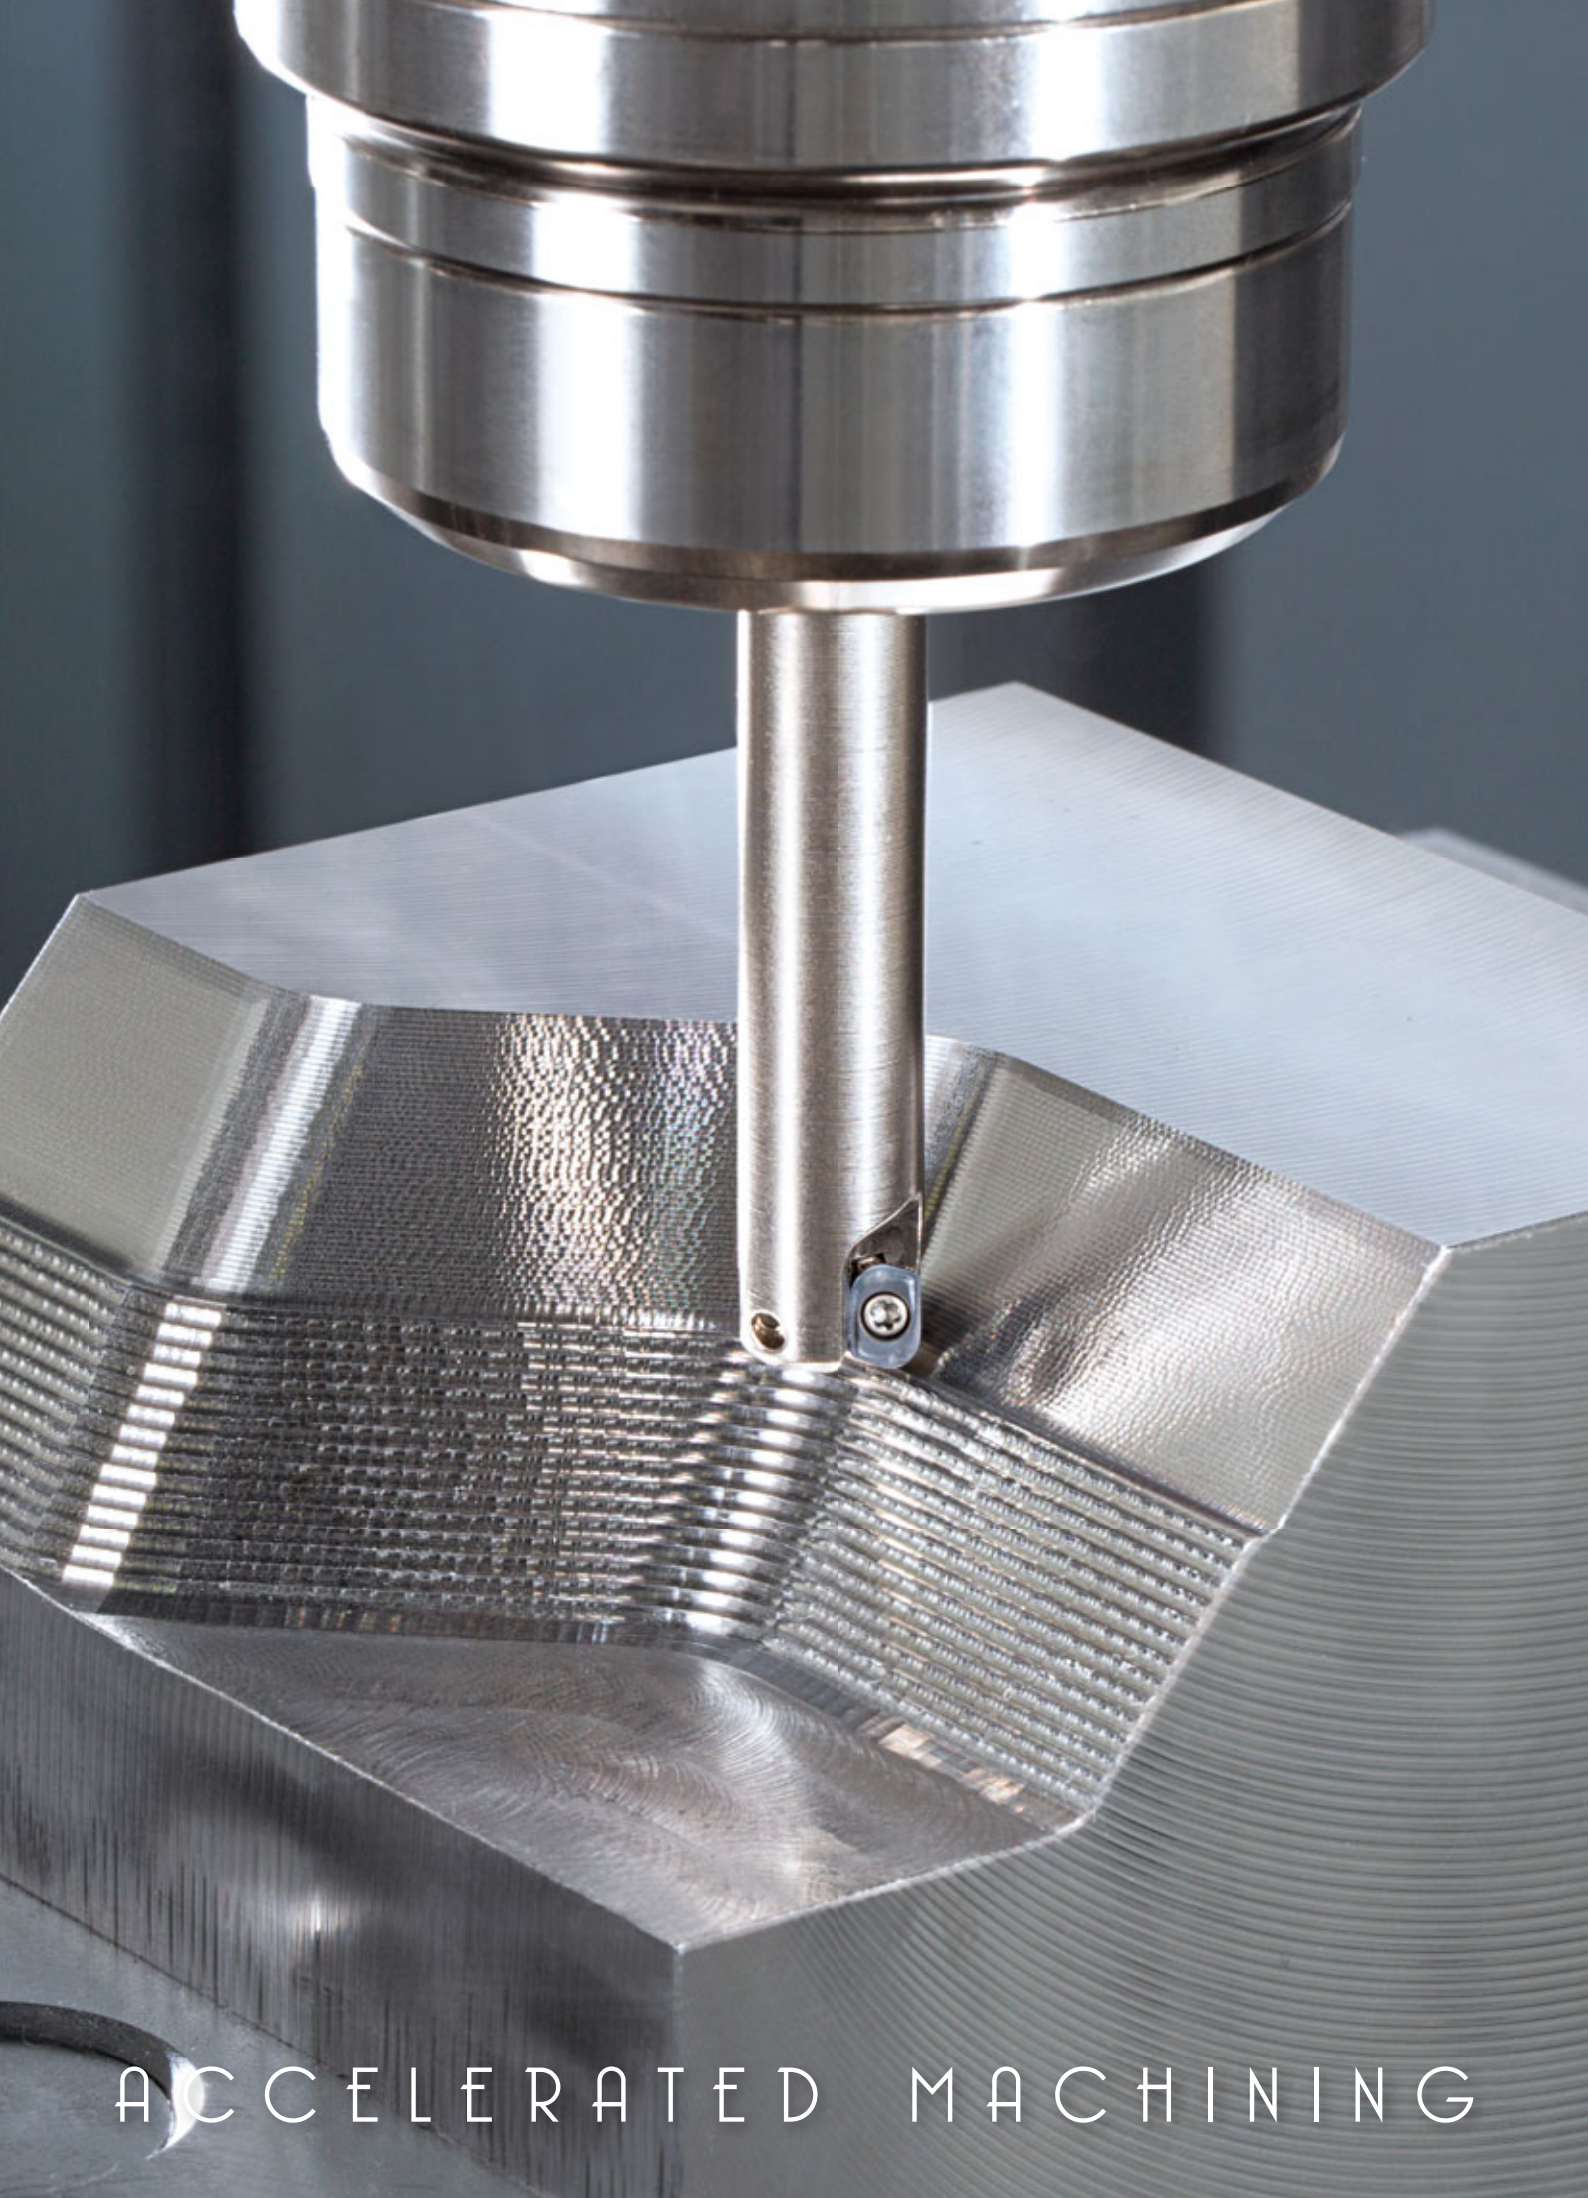

ACCELERATED MACHINING

MillLine

TUNG^{ORCE}**F****FEED**
TUNGALOY




Indexable high-feed milling cutter, available in as small as $\varnothing 8$ mm in diameter, offers free cutting and effective chip control in a wide range of applications.

Small-diameter high feed milling cutter with impressive machining efficiency and reliability

Built to perform at higher machining conditions


Strong insert corner for high feed operations

- Thick insert corner is designed to withstand fracturing force

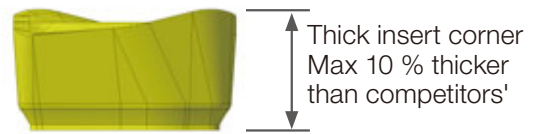

Robust and easy-to-handle insert screws

- M2 screws reduce screw neck shears under high cutting forces. A larger screw enhances insert's fixation and easy handling.

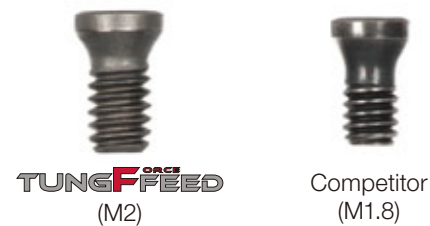


Proper chip formation assures a reliable machining process

Positive inclination angle of the insert promotes smooth chip evacuation

- The positive cutting edge position contributes to a controlled chip formation and easy chip evacuation when machining next to shoulder and slotting operation.

Positive inclination angle



Proper chip control eliminates recuts and premature insert failure

TUNGF^{ORCE}FEED



Ideal curled chips

Competitor



Crushed chips

P Cutter	: EXLS02M010C10.0LF20R02
Insert	: LSMT0202ZER-HM AH3225
Workpiece material	: S55C
Cutting speed	: Vc = 200 m/min
Application	: Slotting
Cutting width	: ae = 0.5 mm × 20 passes
Coolant	: Dry
Machine	: Vertical M/C, BT40

Ensures high efficient machining in various operations

Effective in various 3D milling applications including helical interpolation and ramping



Improved machining efficiency thanks to close pitch design and wider application capability


MRR is improved as much as 5 times!

Table below shows tool performance comparisons when machining S55C carbon steel with a tool diameter of $\phi 16$ mm

	Metal removal rate MRR (cm ³ /min)	Number of teeth	Cutting speed (m/min)	Feed per tooth (mm/t)	Depth of cut (mm)	Width of cut (mm)
TUNGFFEEED	77	5	200	0.80	0.5	10
Competitor's high feed cutter	15	4	200	0.20	0.5	10
Competitor's shoulder mill	62	4	200	0.08	5.0	10
Solid carbide endmill	39	5	100	0.08	5.0	10

High feed capability improves tool life and machining efficiency

Designed with a small entry angle for chatter stability, TungForceFeed's insert significantly improves efficiency and tool life even when machining in long reach areas




Applications requiring a long overhang tool to avoid fixture or workpiece interference

Problems with the conventional tool

- Chatter is more common with long reach areas, preventing higher parameters to be applied
- Chipping and fracture occurs due to chatter

TungForceFeed with long overhang tool performs at highest efficiency and reliability, in long reach machining application

Machining time compared with the conventional tool (L/D = 5, pocketing)

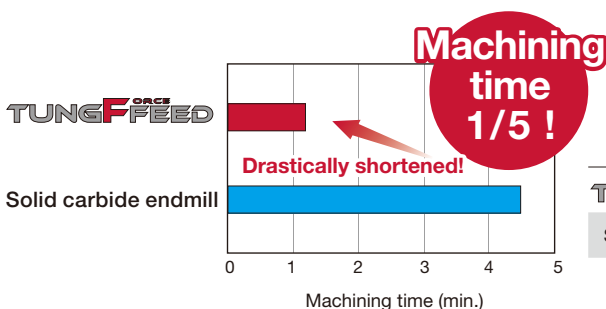


	Tool diameter	Number of teeth	Metal removal rate MRR (cm ³ /min)	Long reach areas (mm)	Cutting speed (m/min)	Feed per tooth (mm/t)	Depth of cut (mm)
TUNGFFEEED	$\phi 12$	2	19	60	150	0.40	0.5 × 20 passes
Solid carbide endmill	$\phi 12$	4	4	60	80	0.08	0.5 × 20 passes


2 insert styles for various applications

High feed insert (LSMT-HM)

- Provides machining efficiency in a wide range of applications
- First choice insert for various applications including slotting, pocketing, or for long reach areas

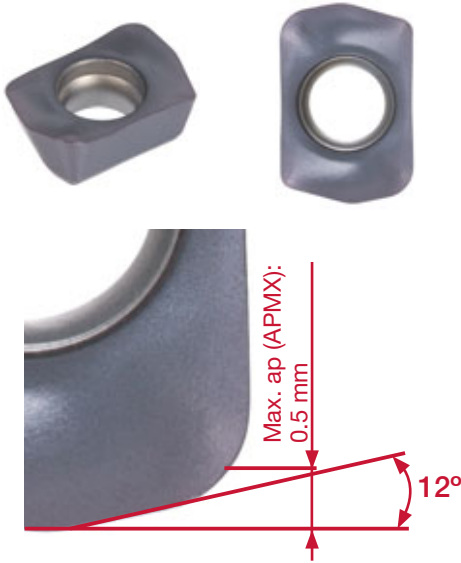


Application range (of standard length body)

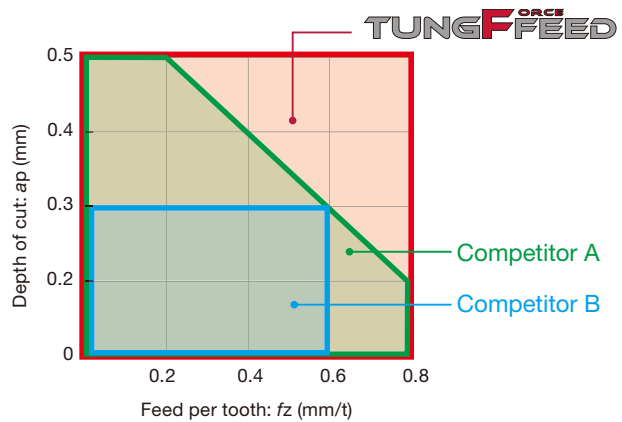


R2 insert (LSMT-MM) (To be released in 2019)

- Full profiling insert design ideal for semi-roughing and semi-finishing of die and mold parts
- Free cutting geometry eliminates chattering and improves surface finish quality
- Built-in side wiper helps reduce burr formation on walls and corners while improving wall accuracy

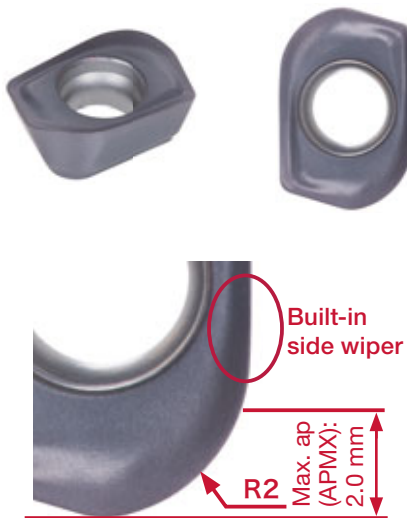

Cutting load comparison (Material: S55C/C55)

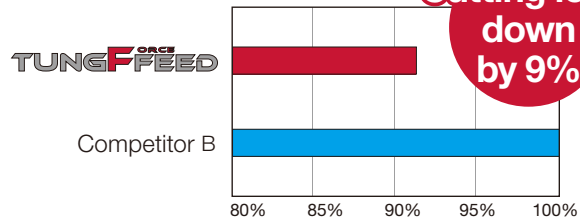

Burr formations on exit




Grade lineup for various materials

New

AH3225

P M

- Nano multi-layer coating technology with three major properties for optimal cutting edge integrity
- Increased resistance to wear, fracture, oxidation, built-up edge, and delamination

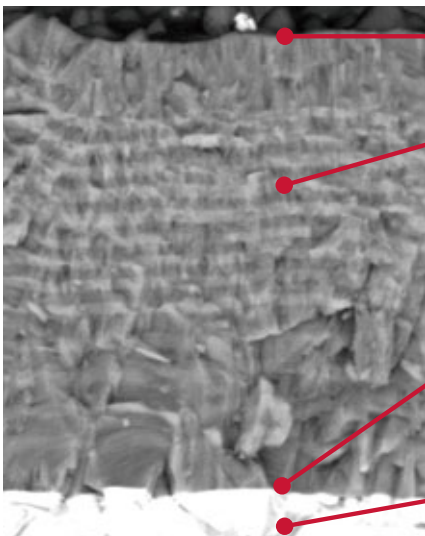

Technology 1 - Resistance to built-up edge

The coating surface prevents built-up edge

Technology 2 - Resistance to wear, oxidation, and fracture

Multi-layered coating is designed to resist wear and oxidation, while preventing micro-cracks from propagating in the coating layer for improved resistance to edge chipping

Technology 3 - Strong coating/substrate adhesion

Coating is optimized for strong adhesion property with substrate to maintain strong cutting edge integrity


Carbide substrate

High resistance to fracture

AH8015

H S K P

- Incorporates a hard coating layer and carbide substrate.
- Strong resistance to wear, heat, and built-up edge, ideal for machining hard or difficult materials.

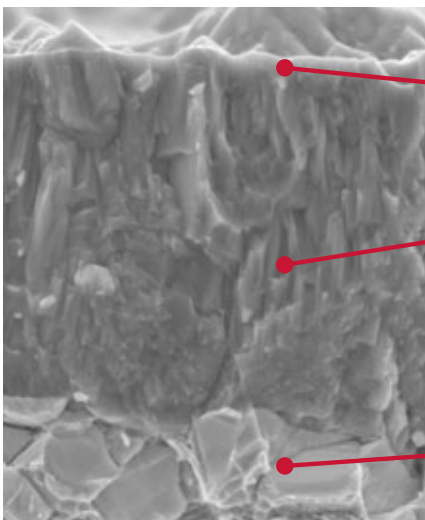

Special surface technology

PREMIUMTEC
TUNGALOY

Smooth insert surface prevents chip adhesion!

Extremely hard layer of nano multi-layered AlTiN coating with high Al content

Increases hardness by 20 %


Prevents micro cracks from developing

Carbide substrate

High resistance to wear

EXLS

Cylindrical type holder for high-feed milling, screw-on

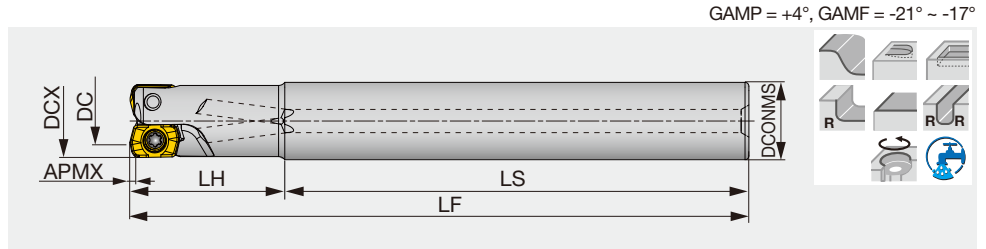

Designation	APMX	DCX	CICT	DC	DCONMS	LS	LH	LF	WT (kg)	Air hole	Insert
EXLS02M008C08.0LH16R01	0.5	8	1	4.29	8	59	16	75	0.02	With	LSMT02...
EXLS02M008C08.0LH30R01	0.5	8	1	4.29	8	59	31	90	0.03	With	LSMT02...
EXLS02M010C10.0LH20R02	0.5	10	2	6.28	10	60	20	80	0.04	With	LSMT02...
EXLS02M010C10.0LH40R02	0.5	10	2	6.28	10	60	40	100	0.05	With	LSMT02...
EXLS02M010C08.0LH20R02	0.5	10	2	6.28	8	60	20	80	0.03	With	LSMT02...
EXLS02M012C12.0LH20R03	0.5	12	3	8.31	12	60	20	80	0.06	With	LSMT02...
EXLS02M012C12.0LH50R02	0.5	12	2	8.31	12	60	50	110	0.08	With	LSMT02...
EXLS02M012C10.0LH20R03	0.5	12	3	8.31	10	60	20	80	0.04	With	LSMT02...
EXLS02M016C16.0LH30R05	0.5	16	5	12.31	16	70	30	100	0.14	With	LSMT02...
EXLS02M016C16.0LH50R03	0.5	16	3	12.31	16	70	50	120	0.17	With	LSMT02...


SPARE PARTS

Designation	Clamping screw	Lubricant	Wrench
EXLS02M...	CSPB-2H	M-1000	IP-6DB

TUNGFLEX

HXLS

Modular head for high-feed milling, screw-on (TungFlex)

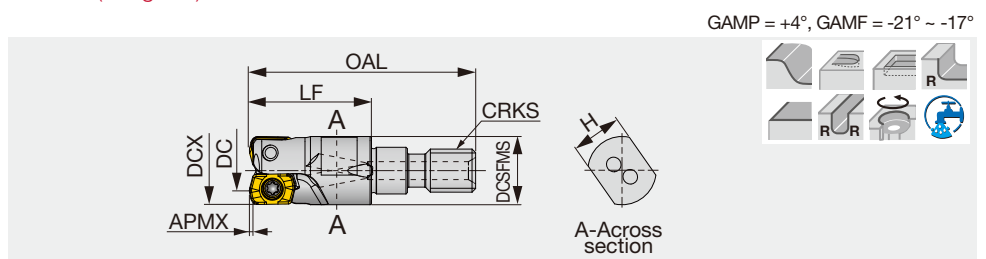


Designation	APMX	DCX	CICT	DC	OAL	LF	H	DCSFMS	CRKS	WT (kg)	Air hole	Insert
HXLS02M008M06R01	0.5	8	1	4.29	33.5	19	7	9.5	M6	0.01	With	LSMT02...
HXLS02M010M06R02	0.5	10	2	6.28	31.5	17	7	9.5	M6	0.01	With	LSMT02...
HXLS02M012M06R03	0.5	12	3	8.31	31.5	17	7	10	M6	0.01	With	LSMT02...
HXLS02M012M06R02	0.5	12	2	8.31	31.5	17	7	10	M6	0.01	With	LSMT02...
HXLS02M016M08R05	0.5	16	5	12.31	40	23	10	13	M8	0.03	With	LSMT02...
HXLS02M016M08R03	0.5	16	3	12.31	40	23	10	13	M8	0.03	With	LSMT02...

SPARE PARTS


Designation	Clamping screw	Lubricant	Wrench
HXLS02M...	CSPB-2H	M-1000	IP-6DB

INSERTS

LSMT-HM (High feed)



LSMT-MM (Radius)



P	Steel	★	☆								
M	Stainless	★	☆								
K	Cast iron	☆	★								
N	Non-ferrous										
S	Superalloys	☆	★								
H	Hard materials		★								

★ : First choice
☆ : Second choice

Designation	RE	APMX	Coated								LE	INSL	IC	S
			AH3225	AH8015										
LSMT0202ZER-HM	1	0.5	●	●							1.7	6.4	4.2	2.3
LSMT0202R2-MM	2	2.0	●	●							-	6.4	4.3	2.3


● : To be released in 2019
● : Line up

STANDARD CUTTING CONDITIONS

ISO	Workpiece materials	Hardness	Priority	Grades	Cutting speed Vc (m/min)	Feed per tooth fz (mm/t)	
P	Carbon steels (S45C / C45, S55C / C55, etc)	- 300HB	First choice	AH3225	100 - 300	0.2 - 0.8	
		- 300HB	For wear resistance	AH8015	100 - 300	0.2 - 0.8	
	Alloy steels (SCM440 / 42CrMo4, etc)	- 300HB	First choice	AH3225	100 - 300	0.2 - 0.8	
		- 300HB	For wear resistance	AH8015	100 - 300	0.2 - 0.8	
	Prehardened steels (NAK80, PX5, etc)	30 - 40HRC	First choice	AH8015	100 - 200	0.2 - 0.5	
		30 - 40HRC	For impact resistance	AH3225	100 - 200	0.2 - 0.5	
M	Stainless steels (SUS304 / X5CrNi18-9, SUS316 / X5CrNiMo17-12-3, etc)	- 200HB	First choice	AH3225	100 - 150	0.2 - 0.5	
K	Gray cast irons (FC250 / 250 / GG25, FC300 / 300 / GG30, etc)	150 - 250HB	First choice	AH8015	100 - 300	0.2 - 0.8	
		150 - 250HB	For impact resistance	AH3225	100 - 300	0.2 - 0.8	
	Ductile cast irons (FCD600 / 600-3 / GGG60, etc)	150 - 250HB	First choice	AH8015	80 - 200	0.2 - 0.8	
		150 - 250HB	For impact resistance	AH3225	80 - 200	0.2 - 0.8	
S	Titanium alloy (Ti-6Al-4V, etc)	- 40HRC	First choice	AH3225	30 - 60	0.1 - 0.3	
		- 40HRC	For wear resistance	AH8015	30 - 60	0.1 - 0.3	
	Heat resistance alloy (Inconel, Hastelloy, etc)	- 40HRC	First choice	AH8015	20 - 50	0.1 - 0.3	
		- 40HRC	For impact resistance	AH3225	20 - 50	0.1 - 0.3	
H	Hardened steel	SKD61 / X40CrMoV5-1, etc	40 - 50HRC	First choice	AH8015	80 - 150	0.1 - 0.5
		SKD11 / X153CrMoV12, etc	50-60HRC	First choice	AH8015	50 - 70	0.1 - 0.3


APPLICATION

LSMT02-HM

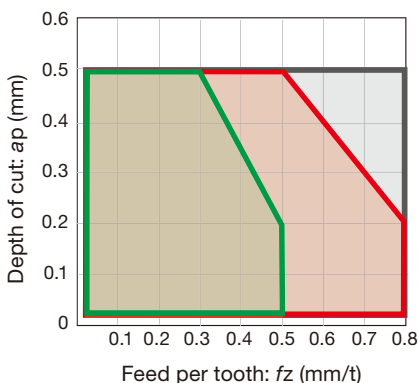

- For standard shanks in $\leq 3xD$
- For long-neck shanks in $\geq 4xD$
- For modular head shanks in $\geq 7xD$

LSMT02-MM

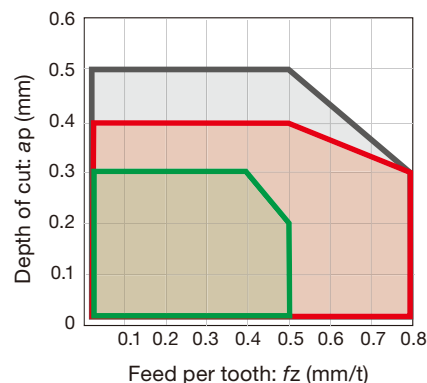


- For standard shanks in $\leq 3xD$
- For long-neck shanks in $\geq 4xD$
- For modular head shanks in $\geq 7xD$

* When the DOC is 0.5 mm or more, the feed less than 0.15 mm/t is recommended.

Tool dia.: ϕD_c (mm), Number of revolutions: n (min-1), Feed speed: V_f (mm/min), Max. depth of cut: $a_p = 0.5$ mm, Number of teeth: CICT


$\phi 8$, CICT = 1		$\phi 10$, CICT = 2		$\phi 12$		$\phi 16$			
n	V_f	n	V_f	n	V_f		n	V_f	
					CICT = 2	CICT = 3		CICT = 3	CICT = 5
7960	3980	6370	6370	5310	5310	7970	3980	5970	9950
$V_c = 200$ m/min, $f_z = 0.5$ mm/t									
7960	3980	6370	6370	5310	5310	7970	3980	5970	9950
$V_c = 200$ m/min, $f_z = 0.5$ mm/t									
5970	2390	4780	3820	3980	3180	4780	2990	3590	5980
$V_c = 150$ m/min, $f_z = 0.4$ mm/t									
4780	1910	3820	3060	3190	2550	3830	2390	2870	4780
$V_c = 120$ m/min, $f_z = 0.4$ mm/t									
7960	3980	6370	6370	5310	5310	7970	3980	5970	9950
$V_c = 200$ m/min, $f_z = 0.5$ mm/t									
5970	2990	4780	4780	3980	3980	5970	2990	4490	7480
$V_c = 150$ m/min, $f_z = 0.5$ mm/t									
1590	320	1270	510	1060	420	640	800	480	800
$V_c = 40$ m/min, $f_z = 0.2$ mm/t									
1190	240	1000	400	800	320	480	600	360	600
$V_c = 30$ m/min, $f_z = 0.2$ mm/t									
4780	1430	3820	2290	3190	1910	2870	2390	2150	3590
$V_c = 120$ m/min, $f_z = 0.3$ mm/t									
2390	480	1910	760	1590	640	950	1190	710	1190
$V_c = 60$ m/min, $f_z = 0.2$ mm/t									

MACHINING APPLICATIONS

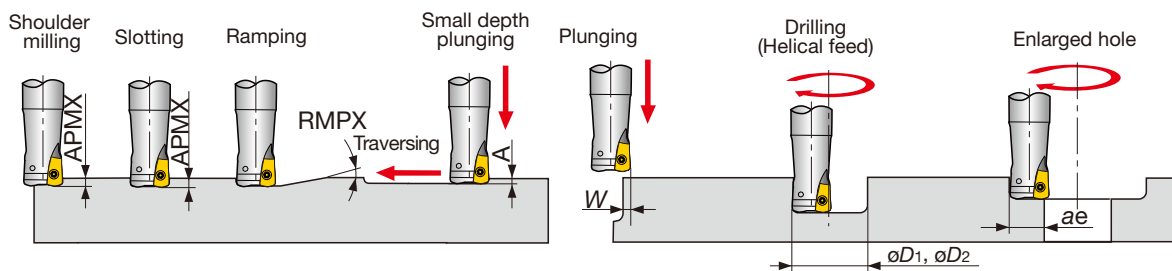

Designation	DC	Max. depth of cut	Max. ramping angle	Max. plunging depth	Max. cutting width in plunging	Min. machining	Max. machining	Max. cutting width in enlarged hole
		APMX	RMPX	A	W	ϕD_1	ϕD_2	ae
E/HXLS02M008...	8	0.5	4°	0.2	2	10	15	5.9
E/HXLS02M010...	10	0.5	3.3°	0.2	2	14	19	7.9
E/HXLS02M012...	12	0.5	2°	0.2	2	18	23	9.9
E/HXLS02M016...	16	0.5	1.3°	0.2	2	26	31	13.9

Tool geometry on programming

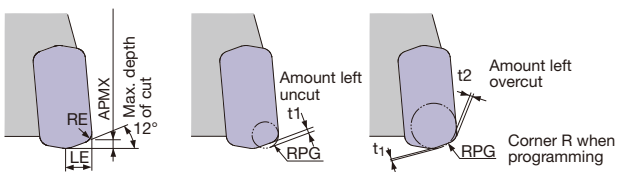


LSMT02...-HM

Corner R when programming: RPG	Amount left uncut t_1 (mm)	Amount left overcut t_2 (mm)
1.0 *Recommend	0.162	0
1.5	0.07	0.14
2	0	0.34

TUNGFLEX SM


TungFlex - Modular shank

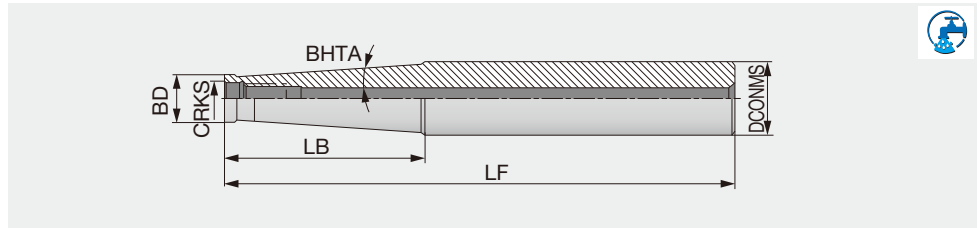

Designation	DCONMS	BD	LF	LB	BHTA	CRKS
SM06-L60C10	10	9.7	60	20	0°	M6
SM06-L105-C12	12	9.7	105	60	1.2°	M6
SM06-L125-C16	16	9.7	125	60	3.3°	M6
SM08-L73C16	16	13	73	25	0°	M8
SM08-L128-C16	16	13	128	80	0.9°	M8
SM08-L170-C20	20	13	170	66.8	3.3°	M8
SM10-L80-C20	20	18	80	30	0°	M10
SM10-L130-C20	20	18	130	80	0.6°	M10
SM10-L200-C25	25	19	200	57.2	3.3°	M10
SM12-L86-C25	25	21	86	30	5.1°	M12
SM12-L200-C32	32	21	200	78	4.4°	M12
SM16-L95-C32	32	29	95	35	1.7°	M16
SM16-L230-C32	32	29	230	50	1.8°	M16

TUNGFLEX BT-ODP(Screw clamping head holder)

TungFlex modular tooling system with BT shank

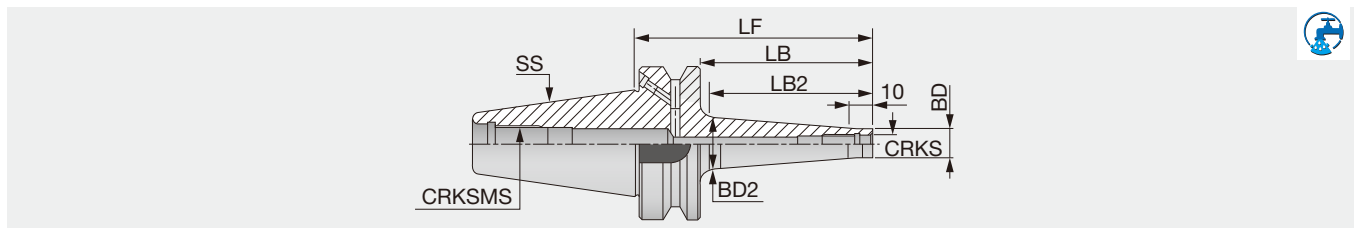

Designation	SS	CRKS	BD	BD2	LF	LB	LB2	CRKSMS
BT40ODP6X66	40	M6	9.8	13	66	39	30	M16
BT40ODP6X106	40	M6	9.8	23	106	79	70	M16
BT40ODP8X66	40	M8	13	15	66	39	30	M16
BT40ODP8X106	40	M8	13	23	106	79	70	M16
BT40ODP10X66	40	M10	18	20	66	39	30	M16
BT40ODP10X106	40	M10	18	28	106	79	70	M16
BT40ODP12X66	40	M12	21	24	66	39	30	M16
BT40ODP12X106	40	M12	21	31	106	79	70	M16
BT40ODP16X66	40	M16	29	28.6	66	39	-	M16
BT40ODP16X106	40	M16	29	34	106	79	70	M16
BT50ODP12X94	50	M12	23	30	94	56	50	M24
BT50ODP12X144 (1)	50	M12	23	40	144	106	100	M24
BT50ODP12X194 (1)	50	M12	23	40	194	156	150	M24
BT50ODP12X244 (1)	50	M12	23	46	244	206	200	M24
BT50ODP16X94 (1)	50	M16	29	34	94	56	50	M24
BT50ODP16X144 (1)	50	M16	29	40	144	106	100	M24
BT50ODP16X194 (1)	50	M16	29	55	194	156	150	M24
BT50ODP16X244 (1)	50	M16	29	60	244	206	200	M24

• Applicable for 10 MPa pressure coolant (1) Balanced to G6.3 at 12,000 min⁻¹

RED screw arbor

(Manufactured by MST corporation)

- Arbor integrated with carbide shank
- Carbide shank provides high rigidity
- Eliminates shank slip-off when rotated at high torque thanks to integrated shank-arbor design
- Chatter-free machining is possible even with long overhang



Ensures the highest performance with changeable-head tools

Optimized for changeable-head tools

Arbors integrated with carbide shank

All types of changeable-heads are mountable



TUNG-FEED
HXLS...


DOFEED
HXN03...

BALL-NOSE
HBFM...

TUNG-TRI
HPA...

Tool rigidity index

Values in "S" column in the table on page 14 indicates the amount of deflection at the tool tip when working load of 9.8N is applied. The smaller the value is, the more rigid the tool is.

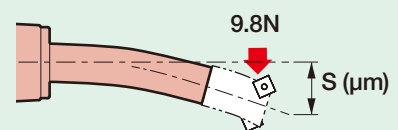


Manufactured by: **MST** corporation

TUNGFLEX





BT-RSG (Screw clamping head holder)

TungFlex modular tooling system with BT shank

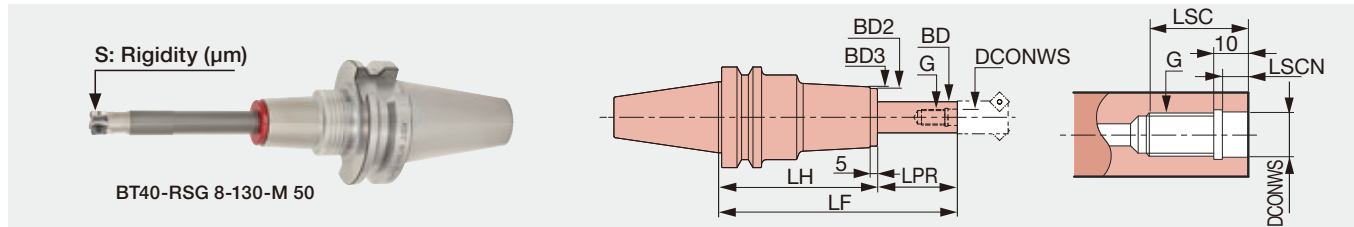

Designation	DCONWS	LSC	LSCN	BD	LF	LPR	LH	BD2	BD3	S	WT (kg)	G
BT40-RSG 8-105-M 25	8.5	18	6.5	15	105	25	80	30	32	0.6	1.4	M8
BT40-RSG 8-135-M 25	8.5	18	6.5	15	135	25	110	30	32	0.7	1.8	M8
BT40-RSG 8-130-M 50	8.5	18	6.5	15	130	50	80	30	32	1.5	1.4	M8
BT40-RSG 8-160-M 50	8.5	18	6.5	15	160	50	110	30	32	1.7	1.8	M8
BT40-RSG 8-155-M 75	8.5	18	6.5	15	155	75	80	30	32	3.1	1.5	M8
BT40-RSG 8-185-M 75	8.5	18	6.5	15	185	75	110	30	32	3.4	1.9	M8
BT40-RSG 8-165-M 85	8.5	18	6.5	15	165	85	80	30	32	4	1.5	M8
BT40-RSG 10-125-M 25	10.5	22	6.5	19	125	25	100	36	38	0.4	1.8	M10
BT40-RSG 10-155-M 25	10.5	22	6.5	19	155	25	130	36	38	0.5	2.2	M10
BT40-RSG 10-150-M 50	10.5	22	6.5	19	150	50	100	36	38	0.9	1.9	M10
BT40-RSG 10-180-M 50	10.5	22	6.5	19	180	50	130	36	38	1	2.3	M10
BT40-RSG 10-175-M 75	10.5	22	6.5	19	175	75	100	36	38	1.6	2	M10
BT40-RSG 10-205-M 75	10.5	22	6.5	19	205	75	130	36	38	1.8	2.4	M10
BT40-RSG 10-200-M100	10.5	22	6.5	19	200	100	100	36	38	2.8	2	M10
BT40-RSG 10-230-M100	10.5	22	6.5	19	230	100	130	36	38	3	2.4	M10
BT40-RSG 12-125-M 25	12.5	22	6	24	125	25	100	43	45	0.3	2	M12
BT40-RSG 12-155-M 25	12.5	22	6	24	155	25	130	43	45	0.4	2.4	M12
BT40-RSG 12-150-M 50	12.5	22	6	24	150	50	100	43	45	0.5	2.1	M12
BT40-RSG 12-180-M 50	12.5	22	6	24	180	50	130	43	45	0.7	2.5	M12
BT40-RSG 12-175-M 75	12.5	22	6	24	175	75	100	43	45	0.9	2.3	M12
BT40-RSG 12-205-M 75	12.5	22	6	24	205	75	130	43	45	1.1	2.7	M12
BT40-RSG 12-200-M100	12.5	22	6	24	200	100	100	43	45	1.4	2.4	M12
BT40-RSG 12-230-M100	12.5	22	6	24	230	100	130	43	45	1.6	2.8	M12
BT50-RSG 8-120-M 25	8.5	18	6.5	15	120	25	95	30	32	0.6	4	M8
BT50-RSG 8-150-M 25	8.5	18	6.5	15	150	25	125	30	32	0.7	4.3	M8
BT50-RSG 8-145-M 50	8.5	18	6.5	15	145	50	95	30	32	1.5	4	M8
BT50-RSG 8-175-M 50	8.5	18	6.5	15	175	50	125	30	32	1.7	4.3	M8
BT50-RSG 8-170-M 75	8.5	18	6.5	15	170	75	95	30	32	3	4.1	M8
BT50-RSG 8-200-M 75	8.5	18	6.5	15	200	75	125	30	32	3.3	4.4	M8
BT50-RSG 8-180-M 85	8.5	18	6.5	15	180	85	95	30	32	3.9	4.1	M8
BT50-RSG 10-140-M 25	10.5	22	6.5	19	140	25	115	36	38	0.4	4.3	M10
BT50-RSG 10-170-M 25	10.5	22	6.5	19	170	25	145	36	38	0.5	4.6	M10
BT50-RSG 10-165-M 50	10.5	22	6.5	19	165	50	115	36	38	0.8	4.4	M10
BT50-RSG 10-195-M 50	10.5	22	6.5	19	195	50	145	36	38	0.9	4.7	M10
BT50-RSG 10-190-M 75	10.5	22	6.5	19	190	75	115	36	38	1.6	4.5	M10
BT50-RSG 10-220-M 75	10.5	22	6.5	19	220	75	145	36	38	1.7	4.8	M10
BT50-RSG 10-215-M100	10.5	22	6.5	19	215	100	115	36	38	2.7	4.5	M10
BT50-RSG 10-245-M100	10.5	22	6.5	19	245	100	145	36	38	2.9	4.8	M10
BT50-RSG 12-140-M 25	12.5	22	6	24	140	25	115	43	45	0.2	4.6	M12
BT50-RSG 12-170-M 25	12.5	22	6	24	170	25	145	43	45	0.3	5	M12
BT50-RSG 12-165-M 50	12.5	22	6	24	165	50	115	43	45	0.5	4.7	M12
BT50-RSG 12-195-M 50	12.5	22	6	24	195	50	145	43	45	0.6	5.1	M12
BT50-RSG 12-190-M 75	12.5	22	6	24	190	75	115	43	45	0.8	4.9	M12
BT50-RSG 12-220-M 75	12.5	22	6	24	220	75	145	43	45	1	5.3	M12
BT50-RSG 12-215-M100	12.5	22	6	24	215	100	115	43	45	1.3	5	M12
BT50-RSG 12-245-M100	12.5	22	6	24	245	100	145	43	45	1.5	5.4	M12
BT50-RSG 12-240-M125	12.5	22	6	24	240	125	115	43	45	2	5.2	M12
BT50-RSG 16-140-M 25	17	25	6	29	140	25	115	52	54	0.2	5.4	M16
BT50-RSG 16-165-M 50	17	25	6	29	165	50	115	52	54	0.3	5.6	M16
BT50-RSG 16-190-M 75	17	25	6	29	190	75	115	52	54	0.5	5.8	M16
BT50-RSG 16-215-M100	17	25	6	29	215	100	115	52	54	0.7	6	M16
BT50-RSG 16-240-M125	17	25	6	29	240	125	115	52	54	1.1	6.2	M16

PRACTICAL EXAMPLES

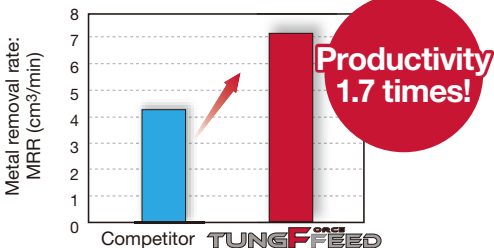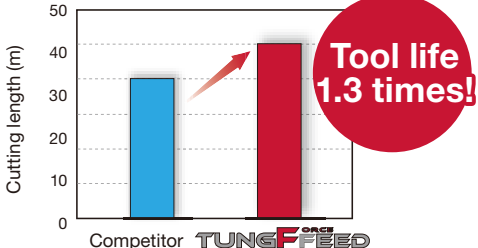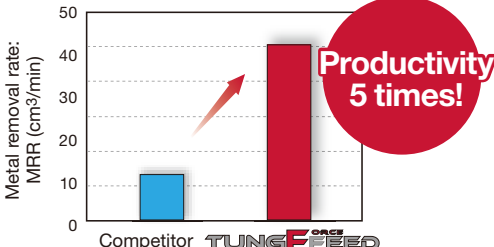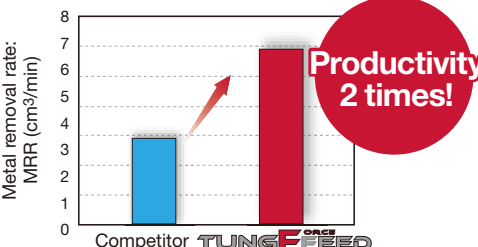Workpiece type		Stator shaft	Stamping die part
Cutter		EXLS02M008C8.0LH16R01 (ø8, CICT = 1)	HXLS02M010M06R02 (ø10, CICT = 2)
Insert		LSMT0202ZER-HM	LSMT0202ZER-HM
Grade		AH3225	AH3225
Workpiece material		S45C	SKD11 (before hardening)
Cutting speed : V_c (m/min)		150	120
Feed per tooth: f_z (mm/t)		0.5 (Competitor : $f_z = 0.3$)	0.6
Depth of cut : ap (mm)		0.3	0.3
Width of cut : ae (mm)		8	5
Machining		Grooving	Pocketing
Coolant		Wet	Dry
Machine		Vertical MC, BT30	Vertical MC, BT40
Results		 <p>Productivity 1.7 times!</p> <p>TungForceFeed insert's light cutting action ensured reliable high feed milling improving MRR by 1.7x</p>	 <p>Tool life 1.3 times!</p> <p>AH3225 prevented wear and chipping, while improving tool life by 1.3 times.</p>
Workpiece type		Stamping die part	Turbine blade
Cutter		EXLS02M012C12.0LH50R02 (ø12, CICT = 2)	EXLS02M008C8.0LH16R01 (ø8, CICT = 1)
Insert		LSMT0202ZER-HM	LSMT0202ZER-HM
Grade		AH3225	AH8015
Workpiece material		SKD61 (45HRC)	Inconel 939
Cutting speed : V_c (m/min)		113	30
Feed per tooth: f_z (mm/t)		0.5 (Competitor : $f_z = 0.1$)	0.2 (Competitor : $f_z = 0.05$)
Depth of cut : ap (mm)		0.3	0.3
Width of cut : ae (mm)		12	8
Machining		Face milling	Grooving
Coolant		Air	Dry
Machine		Vertical MC, BT50	Vertical MC, BT50
Results		 <p>Productivity 5 times!</p> <p>Strong TungForceFeed inserts ensured reliable machining of hard material, improving MRR by 5 times.</p>	 <p>Productivity 2 times!</p> <p>Higher feed per tooth improved MRR by double, while reducing tool cost thanks to indexability.</p>

Tungaloy Corporation (Head office)

11-1 Yoshima-Kogyodanchi
Iwaki-city, Fukushima, 970-1144 Japan
Phone: +81-246-36-8501
Fax: +81-246-36-8542
www.tungaloy.co.jp

Tungaloy America, Inc.

3726 N Ventura Drive
Arlington Heights, IL 60004, U.S.A.
Phone: +1-888-554-8394
Fax: +1-888-554-8392
www.tungaloyamerica.com

Tungaloy Canada

432 Elgin St. Unit 3
Brantford, Ontario N3S 7P7, Canada
Phone: +1-519-758-5779
Fax: +1-519-758-5791
www.tungaloy.co.jp/ca

Tungaloy de Mexico S.A.

C Los Arellano 113,
Parque Industrial Siglo XXI
Aguascalientes, AGS, Mexico 20290
Phone: +52-449-929-5410
Fax: +52-449-929-5411
www.tungaloy.co.jp/mx

Tungaloy do Brasil Ltda.

Avd. Independencia N4158 Residencial Flora
13280-000 Vinhedo, São Paulo, Brasil
Phone: +55-19-38262757
Fax: +55-19-38262757
www.tungaloy.com.br

Tungaloy Germany GmbH

An der Alten Ziegelei 1
D-40789 Monheim, Germany
Phone: +49-2173-90420-0
Fax: +49-2173-90420-19
www.tungaloy.de

Tungaloy France S.A.S.

ZA Courtaboef - Le Rio
1 rue de la Terre de feu
F-91952 Courtaboef Cedex, France
Phone: +33-1-6486-4300
Fax: +33-1-6907-7817
www.tungaloy.fr

Tungaloy Italia S.r.l.

Via E. Andolfato 10
I-20126 Milano, Italy
Phone: +39-02-252012-1
Fax: +39-02-252012-65
www.tungaloy.it

Tungaloy Czech s.r.o.

Turanka 115
CZ-627 00 Brno, Czech Republic
Phone: +420-532 123 391
Fax: +420-532 123 392
www.tungaloy.cz

Tungaloy Ibérica S.L.

C/Miquel Servet, 43B, Nau 7
Pol. Ind. Bufalvent
ES-08243 Manresa (BCN), Spain
Phone: +34 93 113 1360
Fax: +34 93 876 2798
www.tungaloy.es

Tungaloy Scandinavia AB

Bultgatan 38
442 40 Kungälv, Sweden
Phone: +46-462119200
www.tungaloy.se

Tungaloy Rus, LLC

115432, Russian Federation, Moscow,
Andropova avenue., h.18, bld.7, flt. 11,
office 3.
Phone: +7-499-683-01-80/81
www.tungaloy.co.jp/ru

Tungaloy East LLC

620075, Russian Federation, Sverdlovsk
Region, Ekaterinburg, Mamina-Sibiryaka str.,
bldg. 101, room 202
Phone: +7-343-286-48-23/24
Fax: +7-912-284-91-69
www.tungaloy.co.jp/ru

Tungaloy Polska Sp. z o.o.

ul. Genewska 24
03-963 Warszawa, Poland
Phone: +48-22-617-0890
Fax: +48-22-617-0890
www.tungaloy.co.jp/pl

Tungaloy U.K. Ltd

The Technology Centre,
Wolverhampton Science Park
Glaisher Drive, Wolverhampton
West Midlands WV10 9RU, UK
Phone: +44 121 4000 231
Fax: +44 121 270 9694
www.tungaloy.co.jp/uk
salesinfo@tungaloyuk.co.uk

Tungaloy Hungary Kft

Erzsébet királyné útja 125
H-1142 Budapest, Hungary
Phone: +36 1 781-6846
Fax: +36 1 781-6866
www.tungaloy.co.jp/hu
info@tungaloytools.hu

Tungaloy Turkey

Dudullu, OSB 4. Cad No:4
34776 Umraniye Istanbul, TURKEY
Phone: +90 216 540 04 67
Fax: +90 216 540 04 87
www.tungaloy.com.tr
info@tungaloy.com.tr

Tungaloy Benelux b.v.

Tjalk 70
NL-2411 NZ Bodegraven, Netherlands
Phone: +31 172 630 420
Fax: +31 172 630 429
www.tungaloy-benelux.com

Tungaloy Croatia

Josipa Kozarca 4
10432 Bregana, Croatia
Phone: +385 1 3326 604
Fax: +385 1 3327 683
www.tungaloy.hr

Tungaloy Cutting Tool (Shanghai) Co., Ltd.

Rm No 401 No.88 Zhabei
Jiangchang No.3 Rd
Shanghai 200436, China
Phone: +86-21-3632-1880
Fax: +86-21-3621-1918
www.tungaloy.co.jp/tots

Tungaloy Cutting Tool (Thailand) Co., Ltd.

Interlink tower 4th Fl.
1858/5-7 Bangna-Trad Road
km.5 Bangna, Bangna, Bangkok 10260
Thailand
Phone: +66-2-751-5711
Fax: +66-2-751-5715
www.tungaloy.co.th

Tungaloy Singapore (Pte.), Ltd.

62 Ubi Road 1, #06-11 Oxley BizHub 2
Singapore 408734
Phone: +65-6391-1833
Fax: +65-6299-4557
www.tungaloy.co.jp/tspl

Tungaloy Vietnam

LE 04-38, Lexington Residence
67 Mai Chi Tho, Dist. 2,
Ho Chi Minh City, Vietnam
Phone: +84-8-37406660
Fax: +84-8-37406662
www.tungaloy.co.jp/tspl

Tungaloy India Pvt. Ltd.

Indiabulls Finance Centre,
Unit # 902-A, 9th Floor,
Tower 1, Senapati Bapat Marg,
Elphinstone Road (West),
Mumbai-400013, India
Phone: +91-22-6124-8804
Fax: +91-22-6124-8899
www.tungaloy.co.jp/in

Tungaloy Korea Co., Ltd

#1312, Byucksan Digital Valley 5-cha
Beotkkot-ro 244, Geumcheon-gu
153-788 Seoul, Korea
Phone: +82-2-2621-6161
Fax: +82-2-6393-8952
www.tungaloy.co.jp/kr

Tungaloy Malaysia Sdn Bhd

50 K-2, Kelana Mall, Jalan SS6/14
Kelana Jaya, 47301
Petaling Jaya, Selangor Darul Ehsan
Malaysia
Phone: +603-7805-3222
Fax: +603-7804-8563
www.tungaloy.co.jp/my

Tungaloy Australia Pty Ltd

PO Box 2232, Rowville,
Victoria 3178, Australia
Phone: +61-3-9755-8147
Fax: +61-3-9755-6070
www.tungaloy.com.au

PT. Tungaloy Indonesia

Kompleks Grand Wisata Block AA-10 No.3-5
Cibitung
Bekasi 17510, Indonesia
Phone: +62-21-8261-5808
Fax: +62-21-8261-5809
www.tungaloy.co.jp/id



www.tungaloy.com

follow us at:

facebook.com/tungaloyjapan

twitter.com/tungaloyjapan

To see this product in action visit:

Tung-TV

www.youtube.com/tungaloycorporation

Distributed by:



DOWNLOAD
Dr. Carbide App



FIND US ON THE CLOUD!
machiningcloud.com



Available on the
App Store



GET IT ON
Google play



AS9100 Certified
78006
2015.11.04
ISO14001 Certified
EC97J1123
1997.11.26